



ENVIRONMENTAL CONSULTATION & REMEDIATION

---

**KPRG and Associates, Inc.**

**CCR COMPLIANCE  
STATISTICAL APPROACH FOR GROUNDWATER DATA  
EVALUATION**

**Midwest Generation, LLC  
Powerton Station  
13082 East Manito Road  
Pekin, Illinois**

**PREPARED BY:**

KPRG and Associates, Inc.  
14665 West Lisbon Road, Suite 2B  
Brookfield, WI 53005

October 10, 2017

## TABLE OF CONTENTS

<b>SECTION/DESCRIPTION</b>	<b>PAGE</b>
1.0 INTRODUCTION .....	1
2.0 STATISTICAL METHOD SELECTION and BACKGROUND DATA EVALUATION	2
2.1 Outlier Testing .....	2
2.2 Spatial Variability .....	2
2.3 Temporal Variability.....	2
2.4 Test of Normality .....	3
2.5 Non-Detects .....	3
2.6 Prediction Limit Calculation for Normally Distributed Data .....	4
2.7 Prediction Limit Calculation for Non-Normally Distributed Data .....	4
3.0 GROUNDWATER MONITORING – DETECTION and ASSESSMENT.....	5
4.0 CERTIFICATION .....	7

### FIGURE

Figure 1 – Monitoring Well Location Map

### TABLE

Table 1 – Appendix III and IV Parameters

## **1.0 INTRODUCTION**

The Midwest Generation Powerton Generating Station is located at 13082 East Manito Road, Pekin, Tazewell County, Illinois. The facility is a coal-fired electric power generating station occupying approximately 1,710 acres. Units 5 and 6 began operating in 1972 and 1975, respectively. Electrical power is transmitted from the site to the area grid through overhead transmission power lines. In conjunction with the station is a man-made perched cooling pond which occupies approximately 1,440 acres and provides cooling water to the facility.

On April 17, 2015, the United States Environmental Protection Agency published a final rule regulating coal combustion residuals (CCR) as part of 40 CFR 257 (the CCR Rule) that includes a groundwater detection monitoring program. In support of this requirement, the CCR Rule specifically requires that “the owner or operator of a CCR unit must develop a sampling and analysis program that includes procedures and techniques for sample collection, sample preservation and shipment, analytical procedures, chain of custody (COC) control, and quality assurance and quality control.” As a result, each regulated facility must develop a program that meets the CCR Rule. ). Originally, Midwest Generation determined that the Ash Surge Basin and Ash By-Pass Basin were the CCR units that would require monitoring under the CCR Rule. With the recent vacating of Section 257.100(b) through (d), the Former Ash Basin was added to the list of CCR units requiring monitoring. The monitoring well network around these basins consists of fourteen monitoring wells (MW-01, MW-02, MW-03, MW-04, MW-05, MW-08, MW-09, MW-10, MW-11, MW-12, MW-15, MW-17, MW-18 and MW-19) as shown on Figure 1. Wells MW-01 MW-09, MW-10 and MW-19 are considered potential upgradient monitoring wells. The remainder of the monitoring wells are considered downgradient monitoring points.

Section 257.93(f) of the CCR Rule requires the selection of the statistical approach that will be used for assessing the data and determining whether a statistically significant increase over background concentrations in groundwater has occurred at identified downgradient monitoring points. Potential statistical methods that can be applied to the data are listed in Section 257.93(f)(1-5) and performance standards are provided in 257.93(h).

This narrative of the statistical approach that will be used for the Powerton facility’s groundwater monitoring data is intended to fulfill certification requirements under Section 257.93(f)(6). The professional engineer’s certification is provided in Section 4.0. The certification will be placed into the facility’s operating record, noticed to the State Director and posted to the publically accessible internet site.

## 2.0 STATISTICAL METHOD SELECTION and BACKGROUND DATA EVALUATION

Section 257.93(f) identifies five statistical data evaluation methods that can be used for assessing site groundwater data. Relative to the subject site, the prediction interval procedure identified in 257.93(f)(3) will be used. This approach is robust and conforms to varying data distributions and facilitates various non-detect frequencies. U.S. EPA identifies this method as preferred over establishment of tolerance intervals (Statistical Analysis of Groundwater Monitoring Data at RCRA Facilities – Unified Guidance, March 2009 [Unified Guidance]).

Groundwater data collected over eight rounds of sampling at the established background well location will be used to develop prediction limits for the regulated unit for each constituent listed in Part 257 Appendix III and Appendix IV (see Table 1).

Statistical evaluations will be performed with the assistance of the Sanitas<sup>TM</sup> software package.

### 2.1 Outlier Testing

The background dataset(s) will be first checked for potential outliers for each constituent. Potential causes of outliers can be, but are not limited to:

- Changes in sampling technique;
- Changes in analytical methods;
- Data transcription errors;
- Unnatural localized event such as a spill; or
- Natural but extreme variations in constituent concentration.

The Unified Guidance does not recommend removing an outlier from the data set unless it can be shown that the outlier is not caused by extreme natural variation. If the outlier can be traced to other than natural causes, the data set will be adjusted appropriately.

### 2.2 Spatial Variability

If more than one background well is being used for the monitored unit, an evaluation of spatial variability will be performed to determine whether the mean concentration of a constituent varies statistically between the background points. This is generally accomplished by performing an Analysis of Variance (ANOVA). If spatial variation is determined to be present, the background points will be evaluated for potential impacts from the regulated unit. If a background well is determined to be impacted by the unit, it will be discarded from use as a representative background well. If the spatial variability is determined to be natural, an intrawell data evaluation approach may be considered for both upgradient and downgradient wells.

### 2.3 Temporal Variability

Temporal variability in groundwater data from a specific monitoring point occurs when a consistent fluctuation of constituent concentrations occurs over time. The most common example is seasonal variation. If such a variation is noted in the data, the dataset should be corrected to

account for the trend, however, any such corrections must be applied judiciously and would be completed in accordance with the Unified Guidance recommended procedures.

## 2.4 Test of Normality

The main underlying assumption in parametric data evaluations, such as establishing prediction limits, is that the underlying data distribution is normal. A quick approximation can be made by calculating the Coefficient of Variance (CV) which is the quotient of the standard deviation divided by the sample mean. In general, if this quotient is greater than 1, the underlying data distribution is probably not normal. The new Unified Guidance is more conservative and suggests that if this quotient is greater than 0.5, the dataset may not be normal and a more robust distribution evaluation should be performed. Therefore, for any CV value greater than 0.5 for a specific dataset, normality will be evaluated using the Shapiro-Wilk Test with an alpha ( $\alpha$ ) value of 0.05 (or 95%).

If the dataset does not pass this initial test, the data will undergo a log transformation and the test will be repeated for the natural log values of the dataset. If it is determined that this dataset is log-normal, statistical evaluations will be completed on those values and the result converted back to the standard value. If the underlying distribution is also determined not to be log-normal, the Unified Guidance provides for a number of other data transformations that can be performed to evaluate whether those underlying distributions may be normal at which point the entire dataset would be transformed for subsequent calculations.

If a normal underlying distribution can not be determined, non-parametric statistical evaluations will need to be considered which do not rely on a specific underlying distribution.

## 2.5 Non-Detects

It is not uncommon in environmental datasets to have parameters being detected at low concentrations during one sampling event and being not detected in other sampling events. Having a consistent approach to the handling of non-detect values is an important part of the statistical evaluation process. The handling of non-detect values will be accomplished as follows:

- 100 Percent Non-Detects – Assumed that the constituent is not present and no statistical evaluations will be performed. The upper prediction limit will be set at the practical quantitation limit (PQL) established by the analytical laboratory.
- 90 Percent or Greater Non-Detects – A non-parametric evaluation will be performed where the confidence interval will be constructed using the highest detected concentration as the upper prediction limit.
- 50 to 90 Percent Non-Detects – The non-detect values will be replaced with one-half of the reporting limit concentration (RL/2) and a non-parametric evaluation will be performed where the confidence interval will be constructed using the highest detected concentration as the upper prediction limit.

- 0 to 50 Percent Non-Detects - The non-detect values will be replaced with RL/2 and the dataset will be evaluated for distribution normality. If the distribution is normal or log-normal, the sample mean and standard deviation will be adjusted in accordance with Unified Guidance (e.g., Aitchison's Adjustment) and a parametric prediction limit will be established/calculated. If the distribution is not normal or log-normal, non-parametric statistics will be used in accordance with Unified Guidance.

## 2.6 Prediction Limit Calculation for Normally Distributed Data

For datasets where the distribution or underlying transformed distribution is normal, a parametric statistical approach will be used for establishing the prediction limit at the required 95% statistical confidence. In accordance with Unified Guidance, the following equation will be used:

$$95\% \text{ Prediction Limit} = \bar{x} + t_{1-0.05/m, n-1} s \sqrt{1 + \frac{1}{n}}$$

Where:

$\bar{x}$  = the sample mean of the detected or adjusted results

$S$  = sample standard deviation of the detected or adjusted results

$t_{1-0.05/m, n-1}$  = the students t-coefficient for degrees of freedom (n-1) and confidence level (1-0.05/m)

$n$  = the number of samples

$m$  = the number of future samples

The number of future sampling events ( $m$ ) will be set at 2 which will account for one sampling event and a confirmation resampling. This will assist in limiting the potential number of false positives. An acceptable site-wide false positive (SWFP) rate of 10% or less is acceptable under the Unified Guidance.

## 2.7 Prediction Limit Calculation for Non-Normally Distributed Data

If the dataset distribution or underlying distribution is determined not to be normal, a non-parametric approach will need to be used for the establishment of the prediction limit. The non-parametric evaluation will use the highest detected concentration as the upper prediction limit for the specific constituent.

### **3.0 GROUNDWATER MONITORING – DETECTION and ASSESSMENT**

To meet the requirements set forth in Section 257.94(b), a minimum of eight rounds of groundwater data need to be collected by no later than October 17, 2017 for all identified monitoring wells (upgradient and down gradient) and analyzed for Appendix III and IV parameters. At that point, statistical evaluation of the background dataset will be performed to establish the upper prediction limits for each Appendix III constituent. It is noted that in the case of pH, a lower prediction limit will also be established since this parameter has an established upper and lower value range for compliance.

Upon completion of this initial sample dataset generation, “detection monitoring” will be initiated with all wells being sampled on a semi-annual basis for Appendix III parameters. If the results indicate a statistically significant increase (or decrease in the case of pH), a determination will be made whether there may be a source of the increase other than the regulated unit. If this determination can not be made, the regulated unit will transition to “assessment monitoring” within 90 days of the determination of a statistically significant increase. This transition will be placed into the facility record, notified to the State Director and posted on the publically accessible internet site.

Assessment monitoring will conform to Section 257.95. All wells will be sampled for Appendix IV parameters and at least semi-annually thereafter, and all wells will be analyzed for both Appendix III and Appendix IV parameters. In accordance with Section 257.95(d)(1), within 90 days of obtaining the results from the initial and subsequent sampling events required in Section 257.95(b), all wells will be resampled for all parameters in Appendix III and for those detected constituents in Appendix IV.

The initial eight rounds of sampling data generated for the background well will undergo the statistical evaluation discussed above for the Appendix IV parameters and groundwater protection standards (GPSs) will be established in accordance with Section 257.95(h) as follows:

- If the constituent has an established federal Maximum Contaminant Level (MCL) and the MCL is greater than the calculated background upper prediction limit, then the MCL will serve as the GPS. If the background upper prediction limit is greater than the MCL, the upper prediction limit will serve as the GPS.
- If the constituent does not have an established MCL then the calculated upper prediction limit will serve as the GPS.


If continued assessment monitoring shows that there are no statistical exceedances for Appendix III or IV parameters in two consecutive rounds of sampling, detection monitoring will resume and the appropriate notifications will be made of the transition.

If assessment monitoring indicates that one or more Appendix IV constituents exceed the established GPS at one or more downgradient monitoring wells, appropriate notifications will be made and an assessment of corrective measures as required by Section 257.96 will be initiated or a demonstration will be made that a source other than the regulated unit caused the

contamination, or that the statistically significant increase resulted from error in sampling, analysis, statistical evaluation, or a natural variation in the groundwater quality.

#### 4.0 CERTIFICATION

In accordance with Section 257.93(f)(6) of the CCR Rule, I hereby certify based on a review of the information contained within this CCR Compliance Statistical Approach for Groundwater Data Evaluation dated October 10, 2017, the statistical method selected for evaluation of groundwater data associated with the Midwest Generation Powerton Station CCR Units is adequate and appropriate relative to both detection and assessment monitoring.

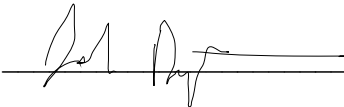
Certified by:  \_\_\_\_\_  
Date: 10-13-17

Joshua Davenport, P.E.

Professional Engineer Registration No. 062.061945

KPRG and Associates, Inc.

**FIGURE**

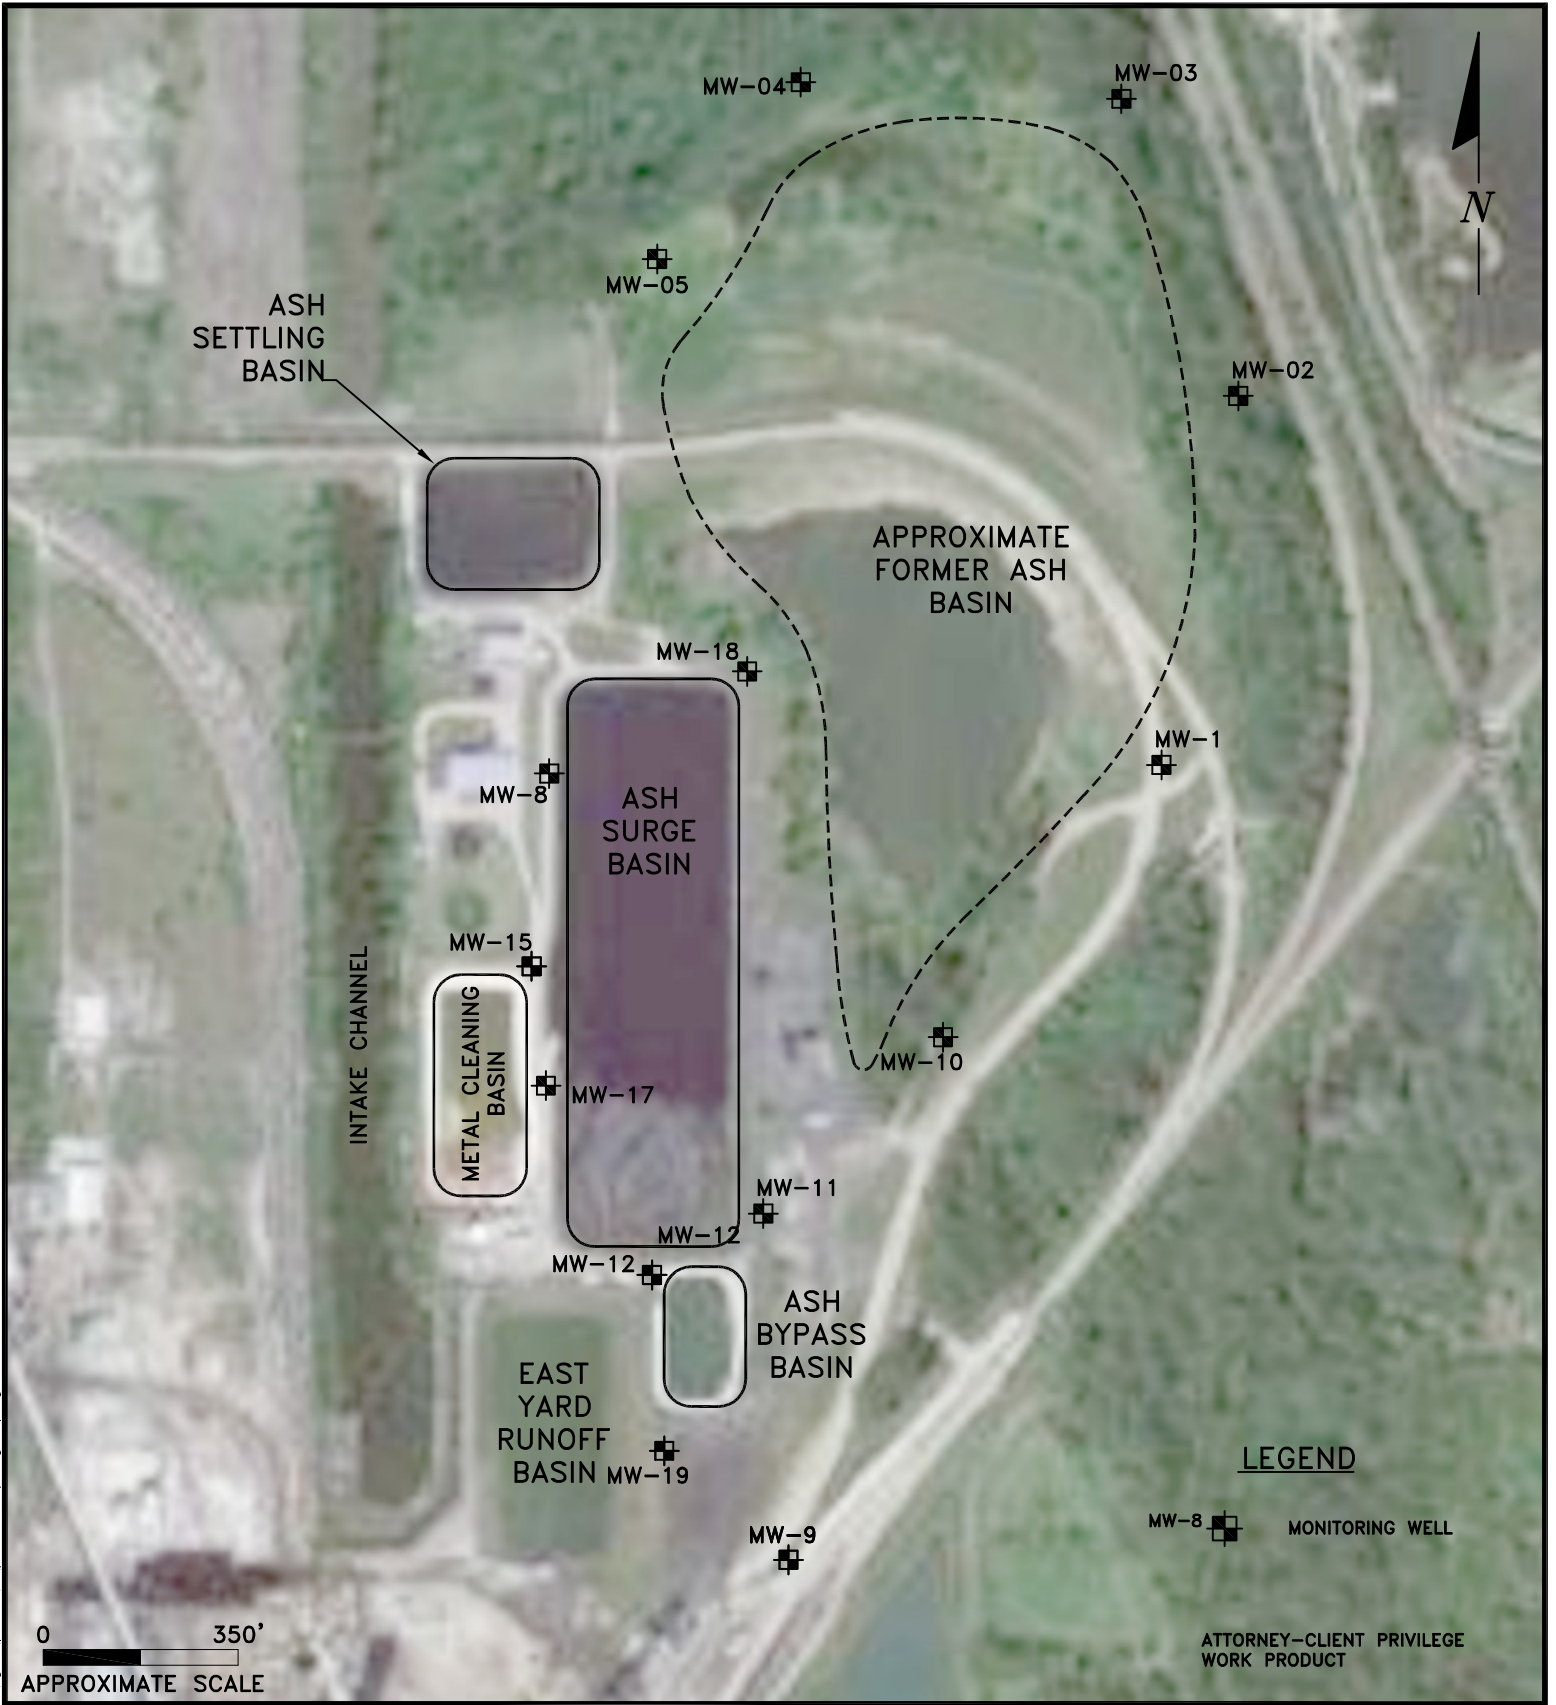

ENVIRONMENTAL CONSULTATION & REMEDIATION

**K P R G**

KPRG and Associates, Inc.

414 Plaza Drive, Suite 106 Westmont, Illinois 60559 Telephone 630-325-1300 Facsimile 630-325-1593

14665 West Lisbon Road, Suite 2B Brookfield, Wisconsin 53005 Telephone 262-781-0475 Facsimile 262-781-0478

**CCR MONITORING WELL SITE MAP**

**POWERTON STATION  
PEKIN, ILLINOIS**

**Scale: 1" = 350'**

**Date: August 9, 2017**

**KPRG Project No. 12313.1**

**FIGURE 1**

W:\projects\midwest\_generation\12313\_groundwater\figures\powerton\ccr\powerton\_ccr\_4g2016\_gw\_map.dwg

## **TABLE**

Table 1. Part 257 Appendix III and IV Parameters

APPENDIX III PARAMETERS
Boron
Calcium
Chloride
Fluoride
pH
Sulfate
Total Dissolved Solids (TDS)
APPENDIX IV PARAMETERS
Antimony
Arsenic
Barium
Beryllium
Cadmium
Chromium
Cobalt
Fluoride
Lead
Lithium
Merciry
Molybdenum
Selenium
Thallium
Radium 226/228 combined